

DX150S - Silent Fan



Online Air Conditioning Store

Key Features

Type:	Axial extract fan.
Application:	Bathrooms, shower rooms, cloakrooms, kitchens and toilets.
Actual size:	229mm (W) x 229mm (H)
Mounting:	Wall & ceiling.

XPELAIR DX150S


The DX150S - 2 speed extract fan is designed for those looking or something conventional, with a modern twist. This fan controls humidity, odours and mould growth effectively.

Fan is fitted with a 150mm dia. impeller and is complete with back draught shutter.

Ancillaries include a fixed outer grille (CFWG150) or an air operated louvre (XLG150).



Performance

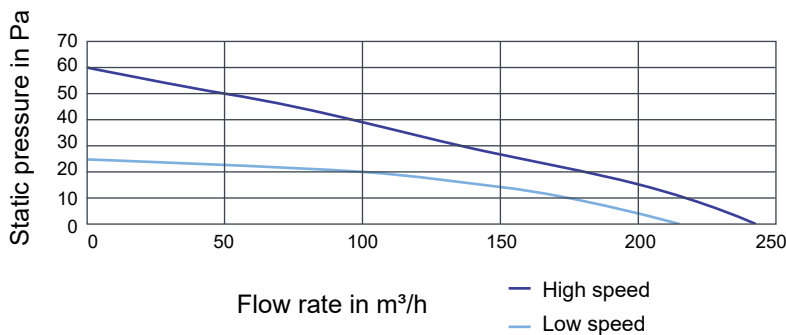

Low Speed		High Speed	
Static pressure	Flow in m³/h	Static pressure	Flow in m³/h
0	231.66	0	241.10
2.6	203.27	5.5	228.76
5.4	191.70	9.8	215.72
8	179.38	14.5	201.85
11.5	166.15	18.3	186.94
13.6	151.76	22	170.74
16.3	135.85	25.1	152.82
18.3	117.79	29.3	132.49
20.2	96.36	35	108.37
21.3	68.40	42.2	76.90
25.3	0.00	59.6	0.00

Specifications

		DX150S
UK reference number:		93070AW
Remote switch (not supplied):		X
Speeds:		2
Extract performance (m³/h)	high/ low:	241 / 214
Extract performance (l/s)	high/ low:	67 / 60
Hole diameter (mm)	wall mount (width & height):	150
Sound pressure level (dB (A)@3m)	high/ Low:	34 / 22
Electrical power rating (W):		22.6 / 15
IP rating		IPX4
Weight (kg):		1.4

DX150S - Silent Fan

Models

DX150S Ref. 93070AW

- Air operated.
- Backdraught shutter.
- Connect to separate switch.

Dimensions (mm)

