

**Series 2, Canopy Extractor, 53 cm,
Stainless steel
DLN53AA50**



The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.

- **silent:** maximal extractor performance with little noise
- **LED-Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Extraction rate:** at MAX_FOERDERLEISTUNG m³/h, it quickly ensures optimal kitchen air quality.
- **Metal grease filters:** filter grease and other solid particles out of the extracted air
- Pi shaped double metal filter

Technical data

Typology : Built-in/Built-under
 Length electrical supply cord : 150 cm
 Min. required niche size for installation (HxWxD) : 208mm x 493.0mm x 257mm mm
 Net weight : 4.6 kg
 Type of control : mechanical
 Number of speed settings : 3
 Maximum output air extraction : 302 m³/h
 Maximum output recirculating air : 300 m³/h
 Number of lights : 2
 Noise level : 62 dB(A) re 1 pW
 Diameter of air outlet : 120 mm
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Convertible
 Optional accessories : DWZ0IN0A0, DWZ0IN0T0
 Total power of the lamps : 6 W
 Grease filter type : Kasette
 Connection Rating : 121 W
 Fuse protection : KSA A
 Voltage : 220-240 V
 Frequency : 50 Hz
 Plug type : Gardy plug w/ earthing
 Installation typology : Built-in
 Material body : Stainless steel
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product : 10.74 x 31.53 x 12.67
 Net weight : 10.000 lbs
 Gross weight : 15.000 lbs
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord : 150 cm
 Dimensions of the product, with chimney (if exists) : x 534.0 x 300.0 mm
 Dimensions of the packed product (HxWxD) : 273 x 801 x 322 mm
 Net weight : 4.6 kg
 Gross weight : 6.8 kg

Series 2, Canopy Extractor, 53 cm, Stainless steel DLN53AA50


The canopy cooker hood: offers you flexibility in your kitchen planning - mount it either on the wall or above a kitchen island.

- Energy Efficiency Class: D*
- Average Energy Consumption: 67.7 kWh/year*
- Blower Efficiency Class: E*
- Lighting Efficiency Class: D*
- Grease Filtering Efficiency Class: D*
- Noise max. Normal Level: 62 dB*


Measures:

- Canopy hood
- Suitable for ducted or recirculating operation
- Recirculating kit
- Sliding switch control for extractor speeds and light
- 3 speed operation
- Single motor
- Removable metal grease filters, dishwasher safe
- 2 x 4 W LED 3W E14
- Light Intensity: 78 lux
- Colour Temperature: 2700 K
- Ducted extraction rate according to DIN/EN 61591: max. 302 m³/h
- Max. extraction rate: 302 m³/h
- Dimensions (HxWxD): 208 x 534 x 300 mm
- built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Power rating: 121 W
- 120 mm diameter pipe


Series 2, Canopy Extractor, 53 cm, Stainless steel
DLN53AA50

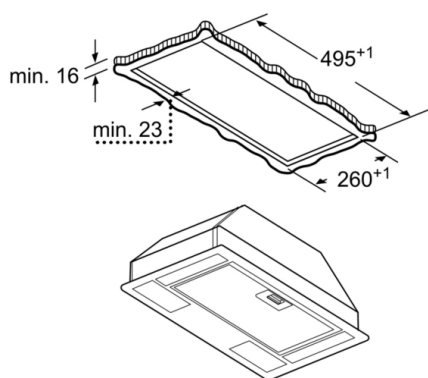


measurements in mm

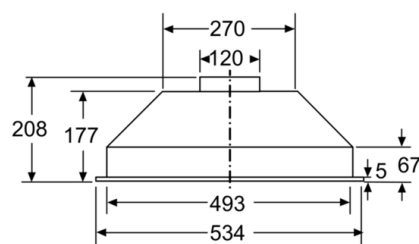

measurements in mm

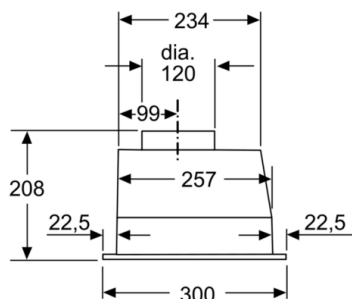

measurements in mm

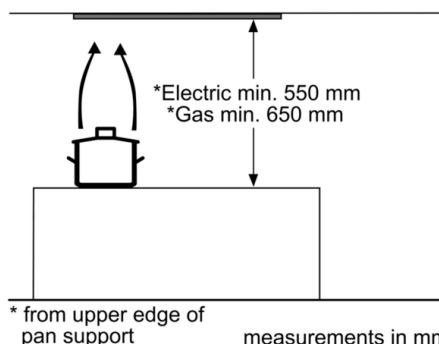

* from upper edge of
pan support

measurements in mm