

**Series 4, Wall-mounted Extractor
Hood, 90 cm, Stainless steel
DWB96IM51Z**



**Box-design hood: performance and
matching kitchen design bundled in one
hood.**

- **silent:** maximal extractor performance with little noise
- **TouchSelect control:** quick touch-control selection of desired settings and light. TouchSelect control: quick touch-control selection of desired settings and light.
- **LED-Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.
- **Extraction rate:** at MAX_FOERDERLEISTUNG m³/h, it quickly ensures optimal kitchen air quality.

Technical data




Typology : Wall-mounted
 Length electrical supply cord : 130 cm
 Height of the chimney : 583-912/583-1022 mm
 Height of product, without chimney : 53 mm
 Net weight : 13.9 kg
 Type of control : Electronic
 Maximum output air extraction : 365 m³/h
 Boost position output recirculating : 441 m³/h
 Maximum output recirculating air : 337 m³/h
 Boost position air extraction : 601 m³/h
 Number of lights : 2
 Noise level : 61 dB(A) re 1 pW
 Diameter of air outlet : 150 / 120 mm
 Grease filter material : Washable stainless steel
 Odour filter : No
 Operating Mode : Convertible
 Optional accessories : DWZ1FX5C6, DWZ1FX5D1, DWZ1DX1B4, DWZ1DX1I4, DWZ1DX1I6, DZZ0XX0P0, DZZ1XX1B6, DHZ1225, DHZ1235, DHZ9550, DHZ9551, DWZ0DX0A0, DWZ0DX0U0, DWZ0XX0J0
 Type of lamps used : LED
 Grease filter type : Kasette
 Connection Rating : 220 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 60; 50 Hz
 Plug type : South Africa plug
 Installation typology : Wall-mounted
 Material body : Stainless steel
 Plug type : South Africa plug
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product : 19.29 x 25.59 x 40.55
 Net weight : 31.000 lbs
 Gross weight : 42.000 lbs
 Motor location : Integrated motor in hood chimney
 No-return airflow flap : No
 Length electrical supply cord : 130 cm
 Dimensions of the product, with chimney (if exists) : 635-1075 MM x 900.0 x 500.0 mm
 Dimensions of the packed product (HxWxD) : 490 x 650 x 1030 mm
 Net weight : 13.9 kg
 Gross weight : 19.2 kg

Series 4, Wall-mounted Extractor Hood, 90 cm, Stainless steel DWB96IM51Z

Box-design hood: performance and matching kitchen design bundled in one hood.

- Energy Efficiency Class: B*
- Average Energy Consumption: 48 kWh/year*
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Noise max. Normal Level: 61 dB*
- Chimney extractor hood
- Brushed steel
- 90 cm Brushed steel Chimney extractor hood with glass canopy
- 90 cm wide
- Suitable for ducted or recirculating operation
- Recirc. kit or clean air kit
- Designed for wall mounted installation
- touch control for extractor speeds and light
- Electronic controls
- touch control with Electronic display
- 3 speed + intensive operation via touch control
- Electronic controls via touch control with Electronic display
- touch control (3 speed + intensive operation) with Electronic display
- 3 speed + intensive operation
- Intensive op. revert dur.: 6 min.
- Twin channel high performance fan motor
- 2 x 1,5W LED
- Light Intensity: 214 lux
- Colour Temperature: 3500 K
- Removable metal grease filters, dishwasher safe
- Extraction rate according to DIN/EN 61591 Ø 15 cm: max. Normal 364 m³/h Intensive 601 m³/h
- Ducted extraction rate according to DIN/EN 61591 max. 364 m³/h
- Maximum extraction 364 m³/h
- Extraction rate exhaust air according to EN 61591: max. normal use 364 m³/h, intensive 601 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 61 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 61 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure)
Intensive: 70 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Max. extraction rate: 601 m³/h
- Extraction rate in recirculation mode:
Max. normal use: 291 m³/h
Intensive: 355 m³/h
- Noise levels in recirculation mode:
Max. normal use: 70 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)
Intensive: 75 dB(A) re 1 pW (62 dB(A) re 20 µPa sound pressure)
- Dimensions exhaust air (HxWxD): 635-965 x 900 x 500 mm ^{2/3}
- Dimensions recirculating (HxWxD): 635-1075 x 900 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):

Series 4, Wall-mounted Extractor Hood, 90 cm, Stainless steel DWB96IM51Z

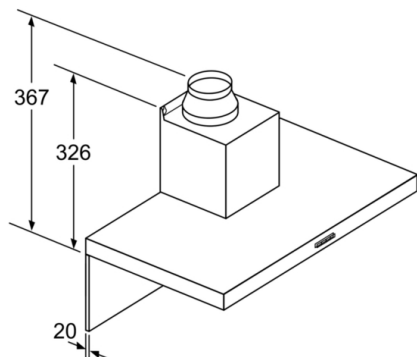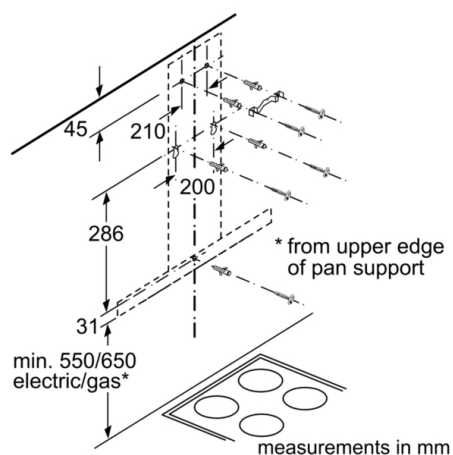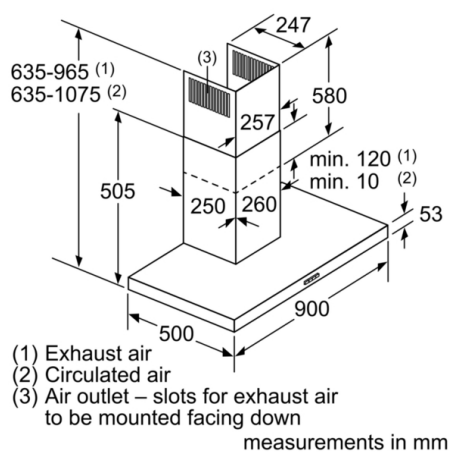

If a back panel is used,
the design of the appliance
must be considered.

measurements in mm