


iQ300, Canopy Extractor, 75 cm, Silver metallic LB75565

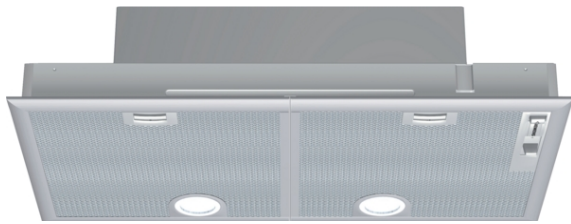

The powerful canopy cooker hood is concealed above the cooktop.

- ✓ LED light: For optimal visibility and atmosphere when cooking.
- ✓ Extremely quiet – The quiet hood that keeps the calm in your kitchen.

Features

Technical data

Typology : Built-in/Built-under
 Length electrical supply cord : 130 cm
 Min. required niche size for installation (HxWxD) : 255mm x 700.0mm x 350mm mm
 Net weight : 8.2 kg
 Type of control : mechanical
 Maximum output air extraction : 379 m³/h
 Boost position output recirculating : 408.0 m³/h
 Maximum output recirculating air : 278 m³/h
 Boost position air extraction : 638 m³/h
 Number of lights : 2
 Noise level : 56 dB(A) re 1 pW
 Diameter of air outlet : 120 / 150 mm
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Convertible
 Optional accessories : HZG9AS00S, LZ73050, LZ74020
 Total power of the lamps : 6 W
 Grease filter type : Kassette
 Connection Rating : 206 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 50 Hz
 Plug type : Gardy plug w/ earthing
 Installation typology : Built-in
 Material body : Lacquered
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product : 11.41 x 30.70 x 17.32
 Net weight : 18.000 lbs
 Gross weight : 21.000 lbs
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord : 130 cm
 Dimensions of the product, with chimney (if exists) : 255 x 730.0 x 380.0 mm
 Dimensions of the packed product (HxWxD) : 290 x 780 x 440 mm
 Net weight : 8.2 kg
 Gross weight : 9.3 kg

Optional accessories

LZ73050	Standard odor filter
---------	----------------------

iQ300, Canopy Extractor, 75 cm, Silver metallic LB75565

Features

- Energy Efficiency Class: C*
- Average Energy Consumption: 81.2 kWh/year*
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Noise max. Normal Level: 56 dB*

Variant:

Design:

Comfort:

Comfort and Safety:

Measures:

Operating and power:

- For installation in a modified cupboard, above a hob
- Suitable for ducted extraction and recirculation
- Charcoal filter
- Removable metal grease filters, dishwasher safe
- Light Intensity: 410 lux
- Colour Temperature: 3500 K
- Sliding switch control for extractor speeds and light
- 3 speed control plus intensive setting
- Twin motor
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 379 m³/h Intensive 638 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 56 dB(A) re 1 pW (43 dB(A) re 20 µPa sound pressure)
 - Intensive: 68 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)
- Max. extraction rate: 638 m³/h
- Dimensions (HxWxD): 255 x 730 x 380 mm
- built-in dimensions (HxWxD): 255 x 700 x 350 mm
- Power rating: 206 W
- 120 or 150 mm diameter pipe
- Yes

* In accordance with the EU-Regulation No 65/2014

iQ300, Canopy Extractor, 75 cm, Silver metallic LB75565

Dimensioned drawings

