



Oscillating Range

600 & 750mm industrial PF fans
(pedestal and wall fans)

Key features:

The 600mm Oscillating Fan is ideal for use in open plan offices, shops, and factories. It is designed to sweep from side to side, moving large volumes of turbulent air across the room, effectively cooling to occupants.

Packaging:

	Wall	Pedestal
Length:	705mm	910mm
Width:	705mm	690mm
Depth:	205mm	180mm
Weight:	14.5kg	25.5kg

How it works:

Air is circulated around the room creating turbulence, which effectively cools occupants. If placed near a window or door, the fan can be used to extract or introduce fresh air to the room. The oscillating fan can operate at three speeds allowing for use in various climatic conditions. The oscillating angle can be adjusted from 0–90° with an easy adjustment mechanism. Height can also be adjusted as well as vertical adjustment limited to 10° off the horizontal.

How it's made:

The oscillating fan is robust, well finished and has an attractive appearance. The fan's components are painted black with the impeller which is adequately guarded. Height oscillation adjustments are easily made without tools. The motor speed control is achieved through a three speed wound motor and selection is made via a selection switch.

How to install:

Electrical connection is via a two meter cord from the motor. The fan can be plugged into a standard 15A socket and must be earthed.


Fan is not yet supplied with a pull cord. Speed can only be regulated with the switch on the motor.



Specifications:

Speed	RPM	Airflow volume (m ³ /s)	Noise (dB)	Power (W)	Voltage (V)
1	1100	2.08	52	170	220
2	1250	2.50	56	170	220
3	1400	3.25	62	170	220

Dimensions:

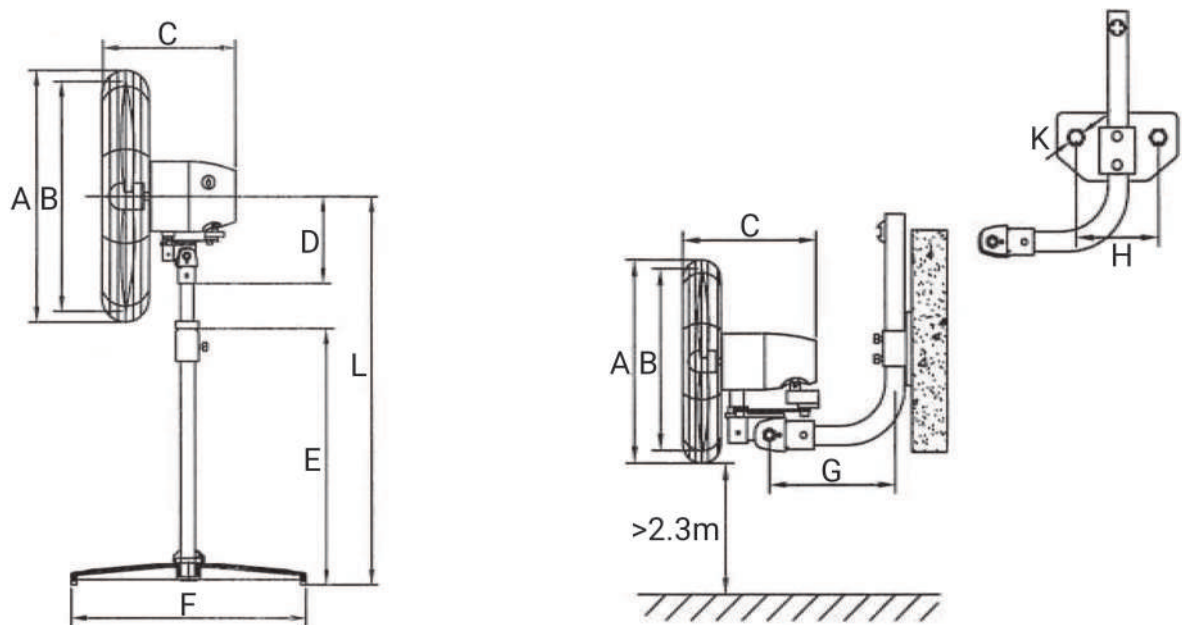

Model	A	B	C	D	E	F	G	H	K	L
600T	660	600	360	205	765	550	–	–	–	1320
600TW	660	600	360	–	–	–	250	125	13	–
750T	815	750	360	205	965	610	–	–	–	1520
750TW	815	750	360	–	–	–	250	125	13	–