


**Series 4, Gas Hob, 60 cm, Tempered glass, Black
POP6C6P30M**

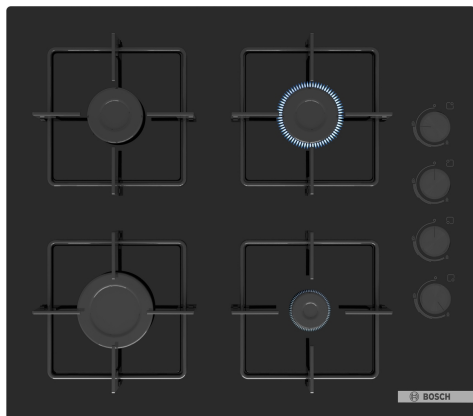

**The gas hob with side-mounted controls:
the desired cooking zones can be
conveniently operated from the side.**

- Knob ignition for a prompt and effective solution.
- Easily removable knobs allow for thorough cleaning of the hob.
- Safety solution for your gas hob.
- 6mm Tempered Glass

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input: Gas
 Total number of positions that can be used at the same time: 4
 Required niche size for installation (HxWxD): 45 x 560-562 x 480-490 mm
 Width of the appliance: 590 mm
 Dimensions: 56x590x520 mm
 Dimensions of the packed product (HxWxD): 145 x 570 x 615 mm
 Net weight: 10.7 kg
 Gross weight: 11.5 kg
 Residual heat indicator: No
 Location of control panel: Lateral
 Basic surface material: Tempered glass
 Color of surface: Black
 Length electrical supply cord: 150.0 cm
 EAN code: 4242005463732
 Gas connection rating: 7500 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz

Series 4, Gas Hob, 60 cm, Tempered glass, Black POP6C6P30M

**The gas hob with side-mounted controls:
the desired cooking zones can be
conveniently operated from the side.**

-
- POP6C6P30M
 - Gas hob with integrated controls, 60 cm

Design

- tempered black hard glass base surface, black
- Steel w rubber feet single

Comfort & Convenience

- Ignition via control knobs: just push and turn the knob to ignite the flame.

Burners and power

- 4 PC
- Left front: High-speed burner up to 3 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: Standard burner up to 1.75 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.


Installation (gas types & measurements)

- Preset of liquid gas (28-30/37mbar)
- Nozzle set for Natural gas nozzles (20 mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 56 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 30 mm
- Power cord 1.5 m Cable with plug: plug and play, no electrician required for installation.
- Connected load: 7.5 KW

Accessories

- cross support for espresso included

Series 4, Gas Hob, 60 cm, Tempered glass, Black POP6C6P30M

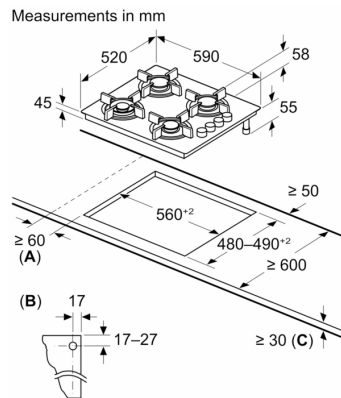

A: Min. distance from the hob cut-out to the wall

B: Position of gas connection in the cut-out

C: With fitted oven underneath possibly more; see space requirements for the oven