


## iQ500, Gas Hob, 60 cm, Stainless steel EC6A5HC90

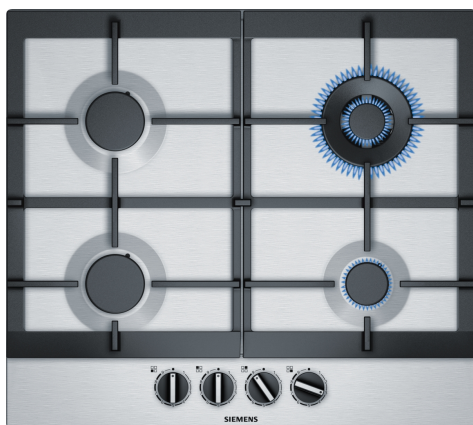

The gas hob with stepFlame Technology for precise flame control in nine steps.

HZ233440 Wok ring  
HZ241110 Small pot support  
HZ298105 Simmer plate

Product name/family: ..... gas hob w integrated controls  
 Design: ..... Built-in  
 Type of heating: ..... Gas  
 Total number of positions that can be used at the same time: 4  
 Type of control setting devices: ..... sword knobs  
 Required niche size for installation (HxWxD): ..... 45 x 560-562 x 480-492 mm  
 Width of the appliance: ..... 582 mm  
 Dimensions: ..... 53x582x520 mm  
 Dimensions of the packed product (HxWxD): ... 141 x 651 x 578 mm  
 Net weight: ..... 12.2 kg  
 Gross weight: ..... 13.0 kg  
 Residual heat indicator: ..... No  
 Location of control panel: ..... Front  
 Basic surface material: ..... Stainless steel  
 Color of surface: ..... Stainless steel  
 Length electrical supply cord: ..... 100.0 cm  
 EAN code: ..... 4242003742006  
 Gas connection rating: ..... 8000 W  
 Fuse protection: ..... 3 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 60; 50 Hz

## iQ500, Gas Hob, 60 cm, Stainless steel EC6A5HC90

### Design

- Stainless steel surface
- cast iron pan support

### Comfort & Convenience

- step valve 9 steps: precisely adjust the flame in nine defined and repeatable levels.
- Sword Knobs: easily access knobs in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the knob to ignite the flame.

### Burners and power

- 4 PC
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: WOK burner up to 3.5 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Connected load: 8 KW

iQ500, Gas Hob, 60 cm, Stainless steel  
EC6A5HC90

