

iQ500, Canopy Extractor, 86 cm,
Stainless steel
LB87NAC50



The powerful canopy cooker hood is seamlessly concealed in the upper cupboard or a brick chimney.

- ✓ cleanAir Plus odour filter: Filters odours, airborne pollen and allergens.
- ✓ LED light: For optimal visibility and atmosphere when cooking.
- ✓ The filters which need to be cleaned for maximum efficiency, can be easily washed in the dishwasher.
- ✓ Intensive setting revert - Peak performance when steam escapes, and an automatic revert after a few minutes.
- ✓ Seamless integration: thanks to flush installation design the canopy hood is almost invisible in an upper cabinet.

LZ10ITP00	Long Life odor filter (replacement)
LZ11ITD11	Long Life recirculation kit external
LZ11IXB16	Clean Air Plus odor filter (replacement)
LZ11IXC16	Clean Air Plus recirc. kit external
LZ55651	Standard odor filter (replacement)
LZ55750	Standard recirculation kit

Typology: Built-in/Built-under
Length electrical supply cord: 150.0 cm
Required niche size for installation (HxWxD): 345mm x 836.0mm x 264mm mm
Height of the appliance: 345 mm
Minimum distance above an electric hob: 500 mm
Minimum distance above a gas hob: 650 mm
Net weight: 10.2 kg
Type of control: Electronic
Number of speed settings: 3-stages + intensive setting
Max. air extraction: 600 m³/h
Boost position output recirculating: 700 m³/h
Max. recirculation: 580 m³/h
Boost position air extraction: 745 m³/h
Maximum Air flow: 600 m³/h
Number of lights: 2
Noise level: 61 dB(A) re 1pW
Diameter of air outlet: 120 / 150 mm
Grease filter material: Washable aluminium
EAN code: 4242003959923
Connection rating: 252 W
Fuse protection: 3 A
Voltage: 220-240 V
Frequency: 60; 50 Hz
Plug type: GARDY plug w/ earthing
Installation typology: Built-in

iQ500, Canopy Extractor, 86 cm, Stainless steel LB87NAC50

Design:

- Canopy hood
- Flush-fitted installation for a seamless integration in wall cupboards.
- Suitable for ducted extraction and recirculation
- For recirculated extraction, various recirculation kits are available as optional accessories.

Features:

- Colour Temperature: 4000 K
- Light Intensity: 350 lux
- Capacitor motor
- 2 metal grease filter(s).

Comfort Features:

- Push button controls with Electronic display
- 3 speed control plus intensive setting
- Automatic reset from intensive to normal setting after 6 min

Cleaning Comfort:

- Removable metal grease filters, that are dishwasher safe
- Easy to clean smooth surfaces and materials.

Exhaust Performance:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
- Speed 1: extraction rate 285 m³/h; noise level 45 dB(A) re 1pW
- Speed 2: extraction rate 410 m³/h; noise level 51 dB(A) re 1pW
- Speed 3: extraction rate 600 m³/h; noise level 61 dB(A) re 1pW
- Intensive Speed 1: extraction rate 745 m³/h; noise level 65 dB (A) re 1pW
- Average Energy Consumption: 50.1 kWh/year*

Recirculation Performance:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory):
- Speed 1: extraction rate 200 m³/h; noise level 59 dB(A) re 1pW
- Speed 2: extraction rate 370 m³/h; noise level 71 dB(A) re 1pW
- Speed 3: extraction rate 440 m³/h ; noise level 73 dB(A) re 1pW
- Intensive Speed 1: extraction rate 460 m³/h; noise level 74 dB (A) re 1pW
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Clean Air Plus recirculation kit, for chimless installation (available as optional accessory):
- Speed 1: extraction rate 270 m³/h ; noise level 51 dB(A) re 1pW
- Speed 2: extraction rate 390 m³/h ; noise level 61 dB(A) re 1pW
- Speed 3: extraction rate 580 m³/h ; noise level 69 dB(A) re 1pW
- Intensive Speed 1: extraction rate 700 m³/h ; noise level 74 dB (A) re 1pW

Technical Information and Sustainability:

- Consumption data:


- Power rating: 252 W
- Voltage: 220 - 240 V
- Sustainability:
- Environmentally friendly packaging

Planning and Installation Information:


- Dimensions (HxWxD): 345 x 860 x 282 mm
- Dimensions recirculating (HxWxD): 345-345 x 860 x 282 mm
- built-in dimensions (HxWxD): 345 x 836 x 264 mm
- Please reference the built-in dimensions provided in the installation drawing
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Yes

**iQ500, Canopy Extractor, 86 cm,
Stainless steel
LB87NAC50**


Measurements in mm

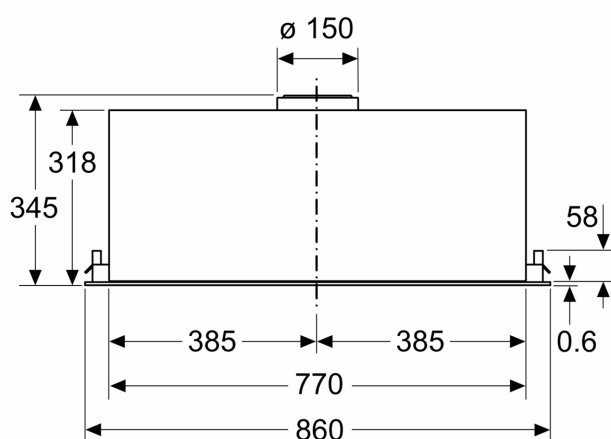


Measurements in mm

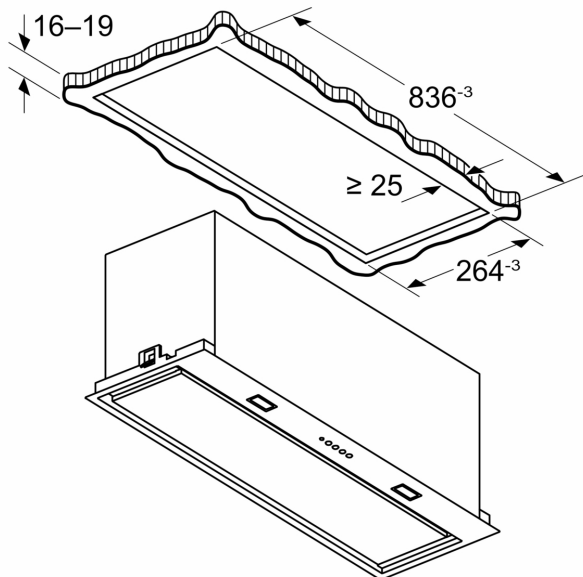

Measurements in mm

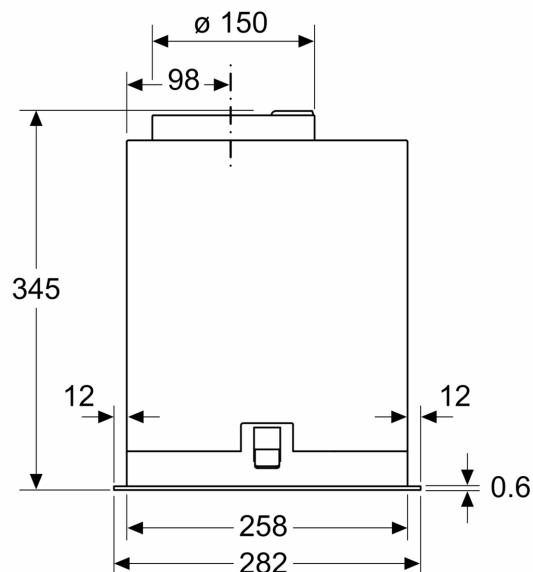

Measurements in mm

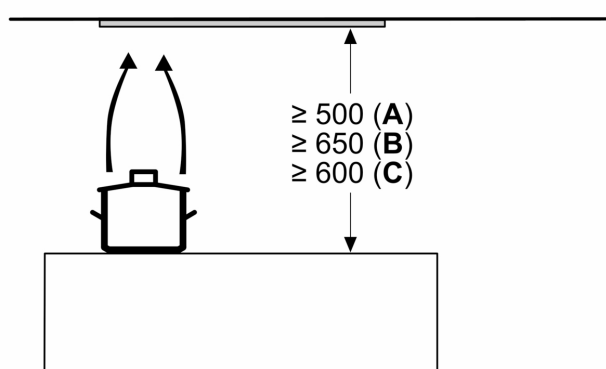

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand