



GX9, GXC9 & GX12

Window/Surface wall fans

Key features:

- Application:** Pubs, restaurants, offices, kitchens, factories, schools & shops.
- Control options:** for 9" and 12"
- Humidity:** XRH controller
- Movement:** XPIRA
- Time delay:** DT20
- Speed:** FR22/30 single fan (2 speeds)
EC6 group controller (variable speed)
- Actual size:** GX9: 312 x 294mm
GXC9: 312 x 294mm
GX12: 408 x 380mm

Packaging:

	GX9	GX12
Height:	360mm	470mm
Width:	310mm	400mm
Depth:	190mm	230mm
Weight:	4kg	7.9kg

The GX9 and GX12 models are also reversible and feature a totally enclosed motor. The motor/impeller assembly is housed in a rigid ABS casing with glossy finish.


An outer grille is provided, moulded in dark grey ABS and incorporate weatherproof vanes.

Operation of the integral anti back-draught shutters shall be controlled by a thermal actuator.


Installation in a 25mm window or panel can be done using the standard metal ladder strips, If installed in thicker than 25mm, use extended ladder strips to enable connection of outer grille to inside of fan (3 for GX9 and 4 for GX12)

All models are suitable for 220–240V, 50Hz mains operation. Class B insulation for operation in ambient temperatures up to 40°C and are fitted with a thermal cut out.

Performance:

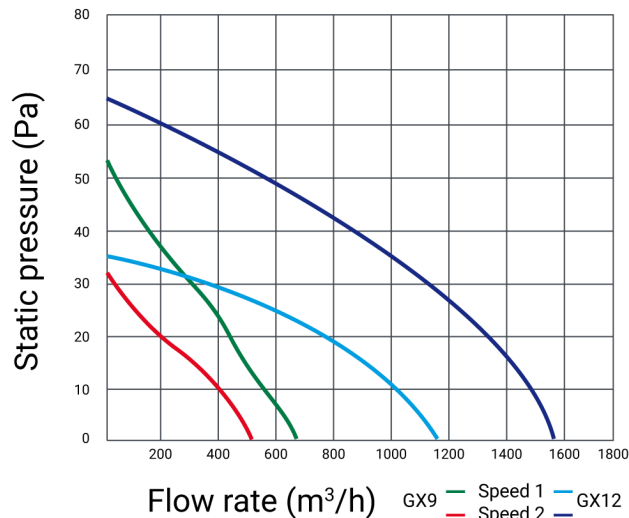

Dimensions:

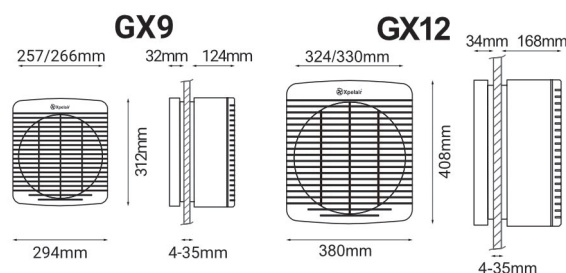

Specifications:

	GX9	GXC9	GX12
UK reference number	89994AW	89995AW	90012AW
Remote switch (supplied separately)	•	–	•
Integral pullcord	–	•	–
Extract performance (m ³ /h) <i>high</i>	636	520	1546
Extract performance (m ³ /h) <i>low</i>	546	–	1091
Extract performance (l/s) <i>high</i>	171	145	429
Extract performance (l/s) <i>low</i>	151	–	303
Hole diameter (mm) window mount	257	257	324
Hole diameter (mm) wall mount	266	266	330
Sound pressure levels (dB(A)@3m) <i>high</i>	50	44	55
Electrical power rating (W)	41	32	85
Weight (kg)	4	4	7.9

Differences in models:

GX9 Ref. 89994AW

- Variable speed use with EC6.
- 2 speed if used with FR22/30 controller.
- Automatic shutter.
- Intake & extract.
- Connect to light switch or separate on/off switch.

GXC9 Ref. 89995AW

- Single speed.
- Pullcord switches fan on/off and opens shutter.
- Extract only.

GX12 Ref. 90012AW

- Variable speed use with EC6.
- 2 speed if used with FR22/30 controller.
- Automatic shutter.
- Intake & extract.
- Connect to light switch or separate on/off switch.

Installation and accessories:

