



**Simple, ready to use,
plug-in solution, for simplicity on site.**





Roof entry versions also available

Plug-in units offer simplified installations and are suited to a wide range of chilling and freezing applications specifically designed for African conditions.


Units are available in a 1,2 or 3 evaporator or condenser fan configuration with a robust, fully-welded and corrosion resistant housing. The range includes models fitted with hermetic or semi-hermetic compressor and high efficiency integrated vertical discharge condenser. The complete refrigeration system is pre-charged, completely factory tested and ready to use.

'Slide through an aperture, connect the power supply and switch on'.

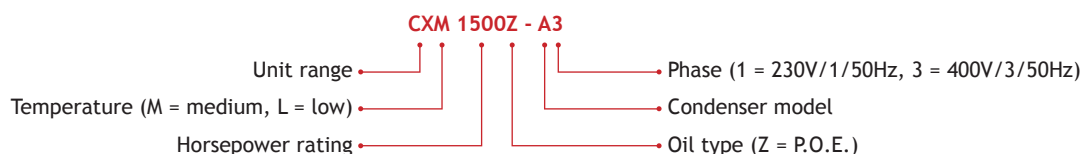

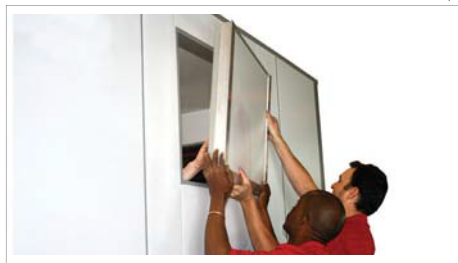

Product Specifications

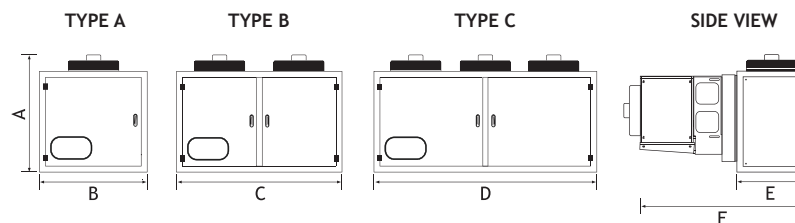

Dimensions		TYPE A	TYPE B	TYPE C	SIDE VIEW
Length	[mm]	750	1150	1150	1300 (F)
Width	[mm]	480	480	480	480 (E)
Height	[mm]	830	830	830	830

Plug thickness: 100mm

Unit Specifications

MODELS		MAXIMUM CURRENT [A]		COMPRESSOR	MAX ROOM	CAPACITY [kW]		CUT OUT SIZE	EVAP FAN
MEDIUM TEMPERATURE	TYPE	230V/1/50Hz	400V/3/50Hz	[hP]	VOLUME [m³]	at -5/45°C	at -25/45°C	L x H [mm]	[mm]
CXM 0625Z - A1	A	7.1	-	0.625	8	1.5	-	710 x 610	1 x 300
CXM 1250Z - A1	A	12.6	-	1.25	14	2.3	-	710 x 610	1 x 300
CXM 1500Z - A1	A	10.6	-	1.5	31	3.2	-	710 x 610	1 x 300
CXM 2000Z - A1	A	14.6	-	2	42	4.1	-	710 x 610	1 x 350
CXM 2500Z - B1	B	15.8	-	2.5	60	5.4	-	1110 x 610	2 x 350
CXM 1500Z - A3	A	-	5.6	1.5	31	3.2	-	710 x 610	1 x 300
CXM 2000Z - A3	A	-	7.3	2	42	4.2	-	710 x 610	1 x 350
CXM 2500Z - B3	B	-	9.7	2.5	60	5.3	-	1110 x 610	2 x 350
CXM 3000Z - B3	B	-	9.3	3	85	6.3	-	1110 x 610	2 x 350
CXM 4000Z - B3	B	-	10.3	4	110	7.1	-	1110 x 610	2 x 350
CXM 4500Z - B3	B	-	12.3	4.5	130	8.6	-	1110 x 610	2 x 350
CXM 6000Z - C3	C	-	16.7	6	150	11.4	-	1510 x 610	3 x 350
CXM 6250Z - C3	C	-	17.1	6.25	170	12.1	-	1510 x 610	3 x 350
CXM 7000Z - C3	C	-	17.6	7	190	13.4	-	1510 x 610	3 x 350
LOW TEMPERATURE									
CXL 1500Z - A1	A	11.6	-	1.5	10	-	1.3	710 x 610	1 x 300
CXL 2000Z - A1	A	18.3	-	2	14	-	2.1	710 x 610	1 x 350
CXL 2500Z - A1	A	36.9	-	2.5	22	-	2.9	710 x 610	1 x 350
CXL 2000Z - A3	A	-	8.1	2	14	-	2.2	710 x 610	1 x 350
CXL 2500Z - A3	A	-	11.1	2.5	22	-	2.6	710 x 610	1 x 350
CXL 3000Z - B3	B	-	12.2	3	30	-	3.2	1110 x 610	2 x 350
CXL 4000Z - B3	B	-	13.8	4	40	-	4.1	1110 x 610	2 x 350
CXL 5000Z - B3	B	-	12.1	5	48	-	4.8	1110 x 610	2 x 350
CXL 6000Z - C3	C	-	14	6	57	-	5.9	1510 x 610	3 x 350